


The A1000 Firmware Update Procedure

Before updating procedure, please keep the power supply connecting, and make sure that the power supply is switched to off. Attention please, **never occurs power outage during the updating procedure**, or it may cause your A1000 cannot work!

Please finish these update procedure as following:


1. Use an available U flash disk which formatted as the FAT32 system. We intensity recommend you format the U flash disk with A1000.
2. Copy the new update file XXXX.MUK to the root directory of U flash disk.
3. Insert the U flash disk to its specified slot of A1000.
4. Press and hold the panel [STORE], [M1] and [M3] buttons simultaneously, and then press the power switch button.
5. Keep pressing the panel [STORE], [M1] and [M3] buttons simultaneously until the screen displays the picture 1 showed below.

Note: The content and version information, displayed on the screen, may different from your goal firmware. This situation will be normal after you have updated firmware successfully.

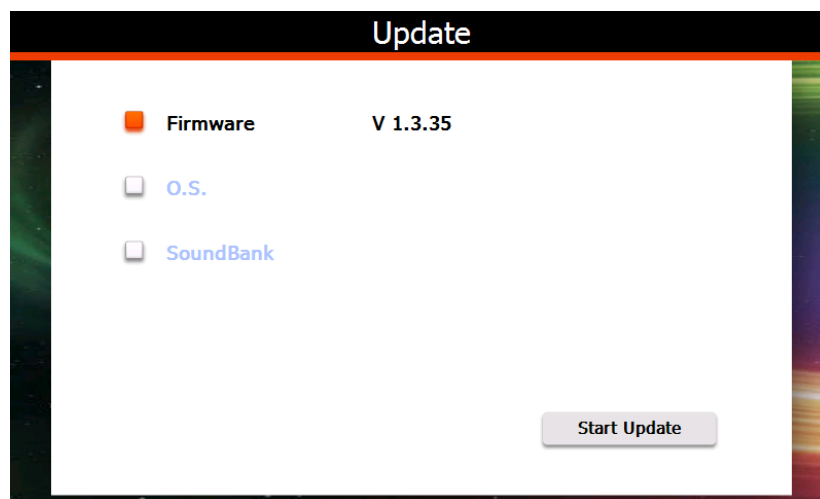


Picture 1

6. Before releasing these [STORE], [M1] and [M3] buttons, press the “Start Update” button to auto start updating procedure, the progress bar will appear at the bottom of screen.
7. Wait about several minutes; the message “Update Successful, Please Reset!” will display at the top right corner if update successfully.

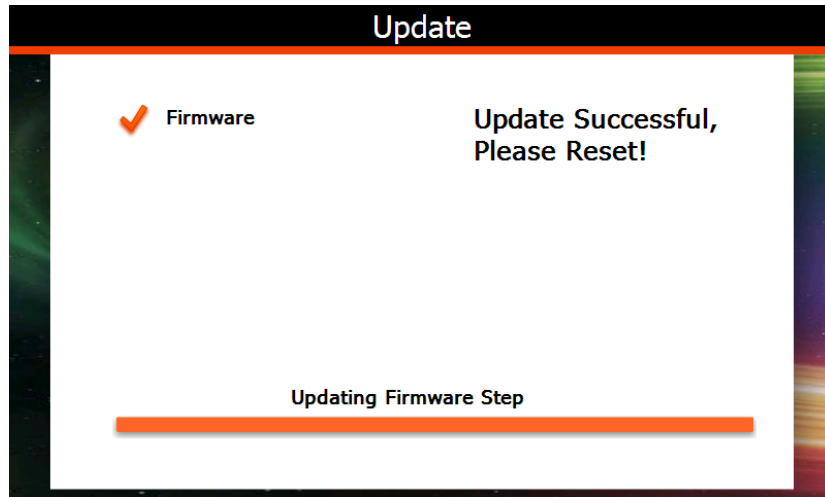

Picture 2

8. Turn off the power, reset the A1000, you will find the updated firmware.
9. If necessary, you can see your currently firmware version from "Config1" tab of "Utility" setting. Just at the bottom right corner.

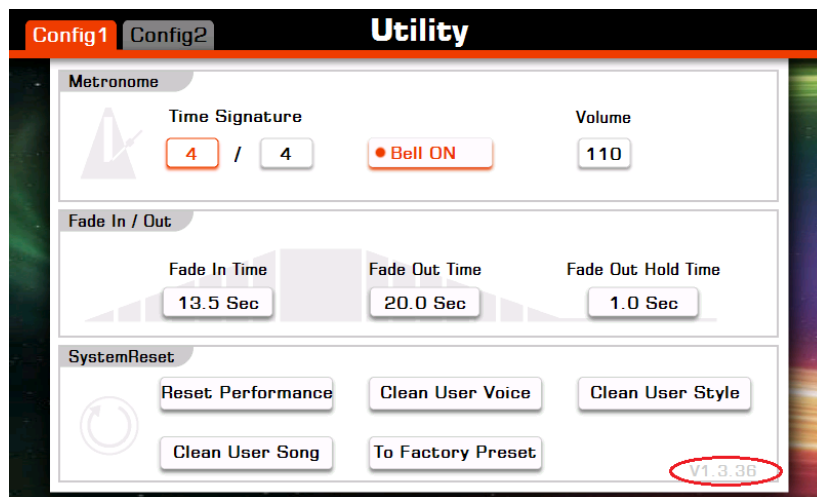

Picture 3