

Russian Tubes

Just data for mostly used Russian power tubes for HF/VHF/UHF

Type No	Filament,		Plate, Volts	Grid 2, Volts	Plate dissipations, Watts	Max F, MHz
	Volts	Amperes				
GU-71	18-21	3	1500	400	125	20
GU-13	9,5- 10,5	5	200	400	100	30
GU- 5B	12,6	40	5000	-	3500	110
GU-19	5,7- 6,9	2	250	250	40	500
GU-29	11,3- 13,9	1,1	750	225	40	500
GU-32	11,3- 13,9	1,6	500	250	15	500
GU- 33B	5,7- 6,9	5	1500	400	150	500
GU-34B	12- 13,2	4	2500	500	650	250
GU-35B	6,2-6,7	34	5000	900	3500	250
GU- 36B	8,3	210	7000	1100	15000	250
GU- 37B	3,3- 3,6	110	3000	-	3500	330
GU- 39B	6- 6,6	95	1000	2000	6000	110
G-807	6- 6,8	0,9	600	300	40	60
GM-70	20	3	1500	-	125	-
GK-71	20	3	1500	400	250	20
GU-47	6,3	60	1000	900	6000	70
GU-40B	6- 6,6	33	5000	830	2000	250
GU-43B	11,3-13,9	6,6	3300	500	1000	100
GU-46	7,9- 8,7	14,75	3000	650	500	600
GU- 47B	6,0- 6,6	60	6000	1200	6000	70
GU- 50	10,8- 14,5	0,7	1000	250	40	120
GU- 64	5,7- 7	3,15	2000	400	100	175
GU- 70B	5,7- 6,3	3,1	3500	400	350	250



Type No	Filament,		Plate, Volts	Grid 2, Volts	Plate dissipations, Watts	Max F, MHz
	Volts	Amperes				
GU-71B	12- 13,2	6,1	3500	400	1500	75
GU- 74B	11,9- 13,3	3,6	2200	300	60	60
GU-77B	25,6- 26,4	3,1	2200	350	1500	250
GU- 80	11,8- 13,5	10,5	3000	600	600	50
GU-81	11,8- 13,5	10,5	3000	600	750	50
GU- 84B	25,6-28,4	3,85	2200	600	2500	250
GS-1B	11,9- 13,3	3,2	3000	-	1000	1000
GS- 3B	23,4- 27,3	3,4	2700	700	3000	1000
GS-7B	11,7- 13	2,95	3000	-	2000	1000
GS-9B	11,7- 13	1,1	2500	-	300	1000
GS-17B	3,1- 3,5	160	5500	1000	1000	1000
GS- 18B	4	210	6500	900	15000	1000

ГY 71 = GU71
 ГY-13 = GU13
 ГY-5Б = GU5B
 ГY- 19 = GU19
 ГY-29 = GU29
 ГY- 32 = GU32
 ГY- 33Б = GU33B
 ГY- 34Б = GU34B
 ГY- 35Б = GU35B

ГY-36Б = GU36B
 ГY-37Б = GU37B
 ГY-39Б = GU39B
 Г-807 = G807
 ГM-70 = GM70
 ГK- 71 = GK71
 ГY- 47 = GU47
 ГY-40Б = GU40B
 ГY- 43Б = GU43B


ГY- 46 = GU46
 ГY-47Б = GU47B
 ГY- 50 = GU50
 ГY- 64 = GU64
 ГY- 70Б = GU70B
 ГY-71Б = GK71
 ГY- 74Б = GU74B
 ГY- 77Б = GU77B
 ГY-80 = GU80

ГY- 81 = GU81
 ГY-84Б = GU84B
 ГC- 1Б = GS1B
 ГC- 3Б = GS3B
 ГC- 7Б = GS7B
 ГC- 9Б = GS9B
 ГC- 17Б = GS17B
 ГC- 18Б GS18B





 FREE magazine edited by hams for hams
www.antentop.bel.ru


ГМ-70

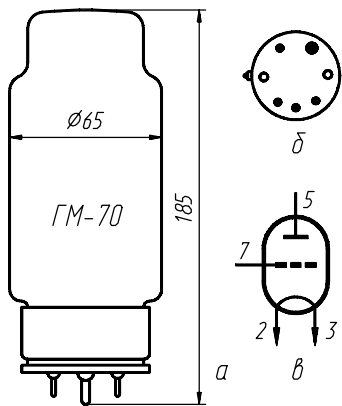


Г-807

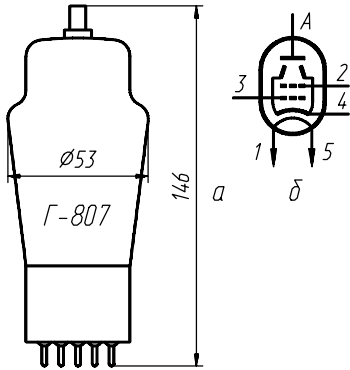


ГЧ-80

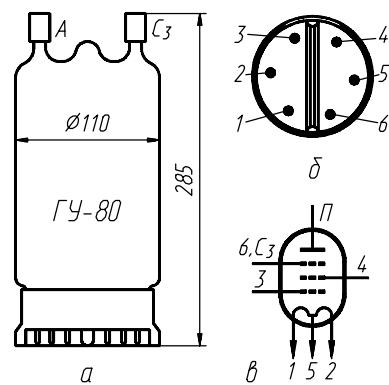


ГЧ-47А

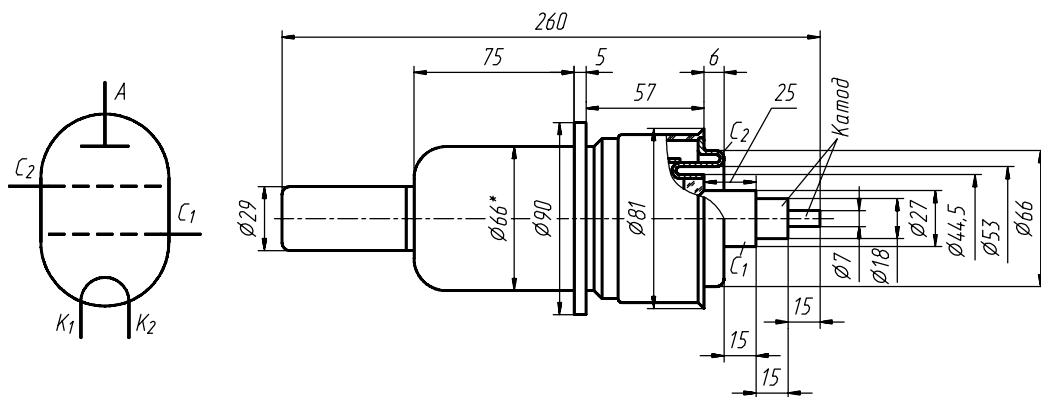


ГЧ-13

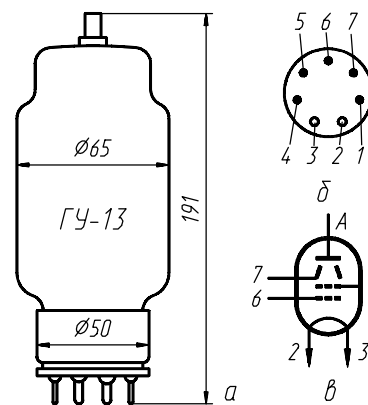


ГЧ-5А

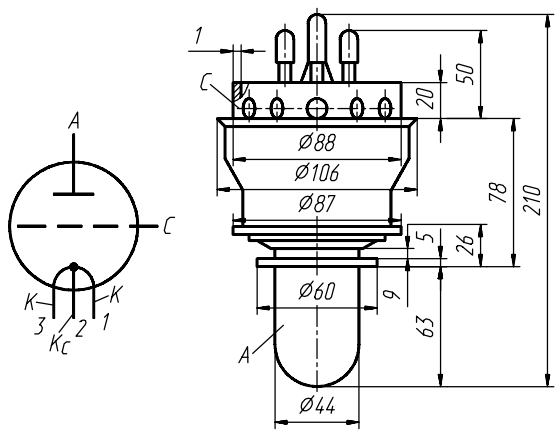

ГЧ-5Б

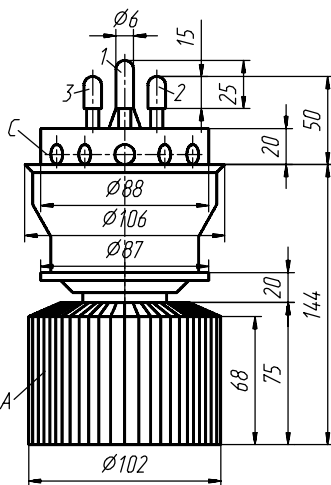


ГЧ-19, ГЧ-19-1

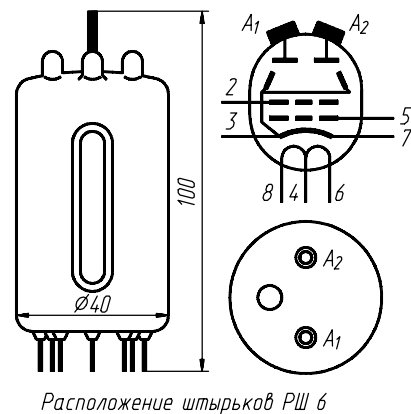


Расположение штырьков РШ 6

ГЧ-29

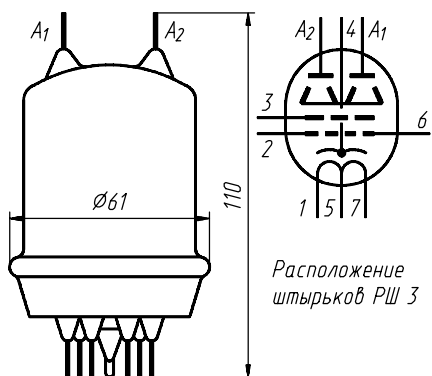


Расположение штырьков РШ 3


ГЧ-33А, ГЧ-33Б

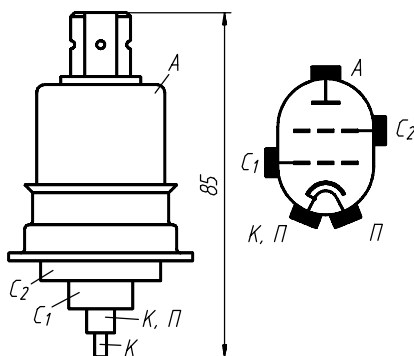


ГЧ-32

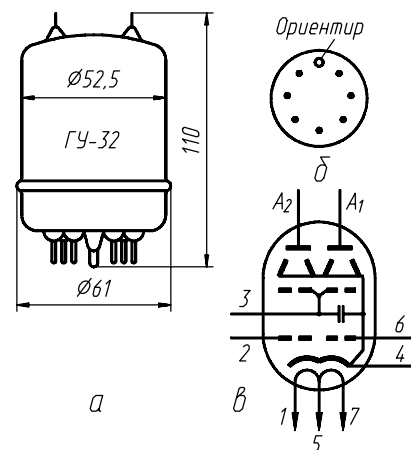


ГЧ-50

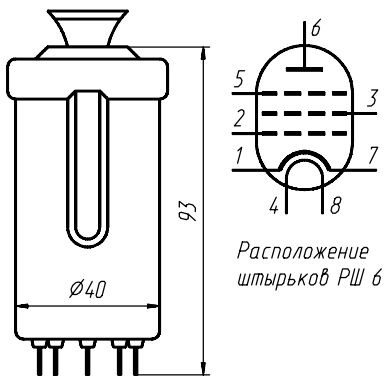


ГЧ-35Б-1

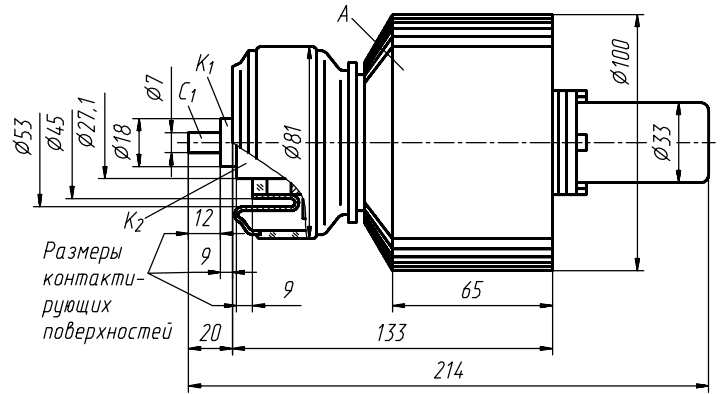


ГЧ-34Б-1

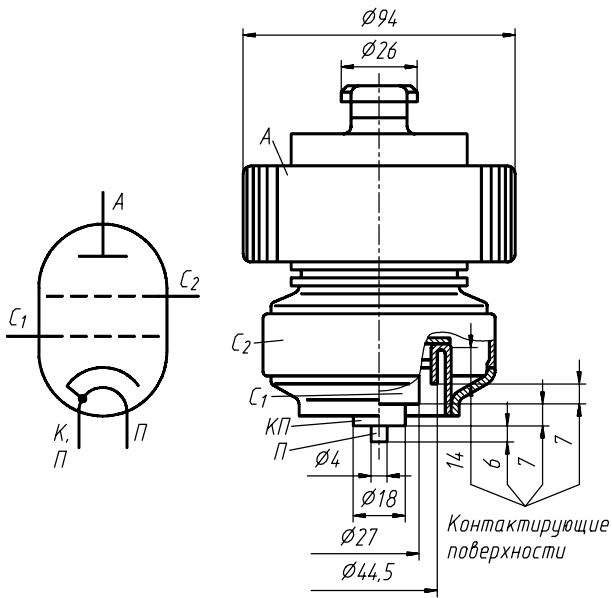


ГЧ-43А

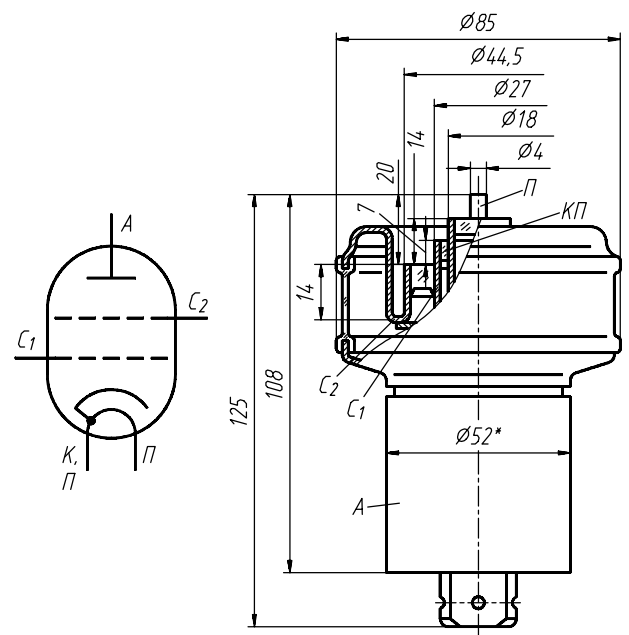


ГЧ-37Б

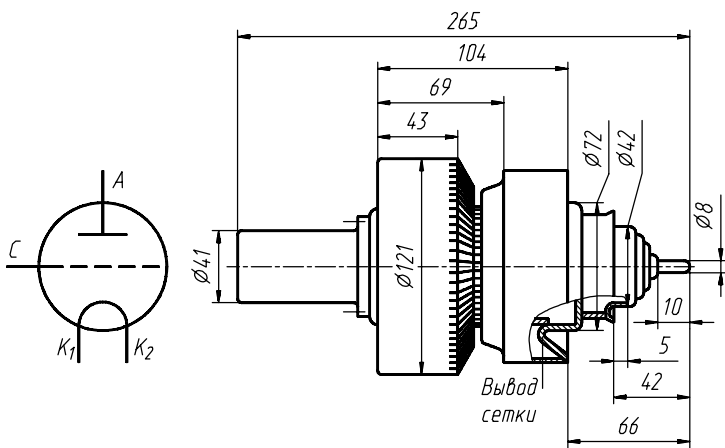


ГЧ-36Б-1, ГЧ-36Б

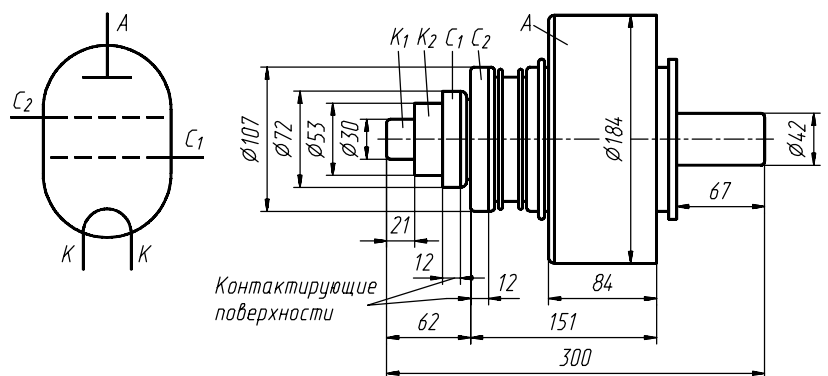


ГЧ-40Б, ГЧ-36Б-1

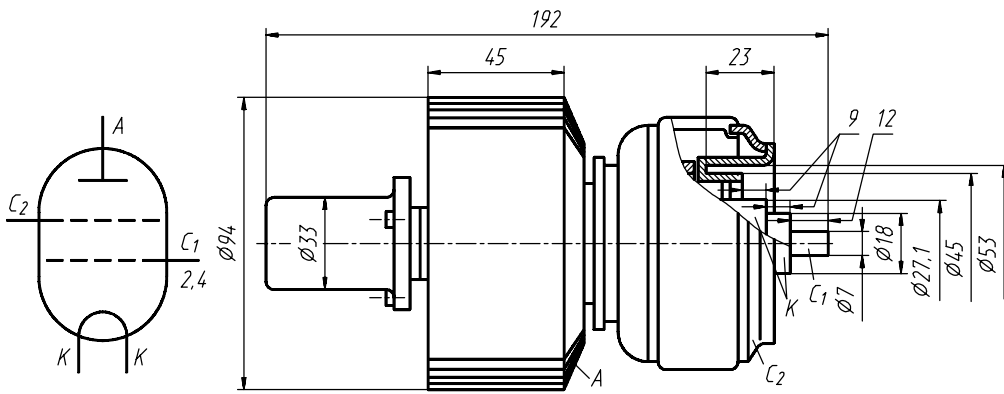


ГЧ-46

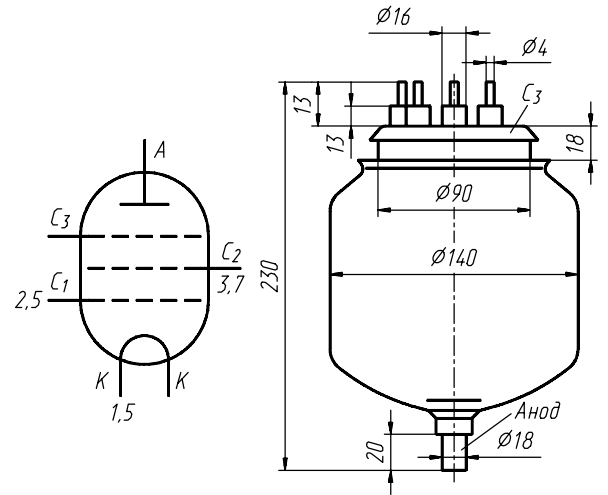


ГЧ-64

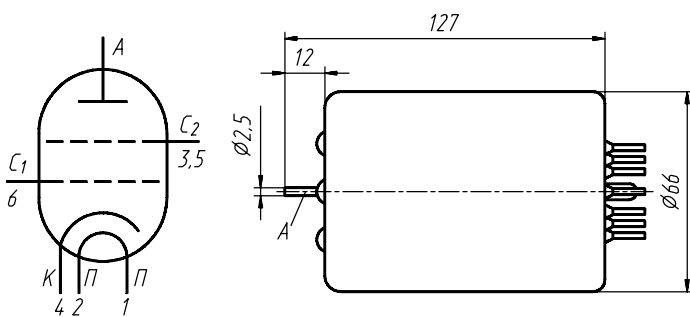


ГЧ-70Б

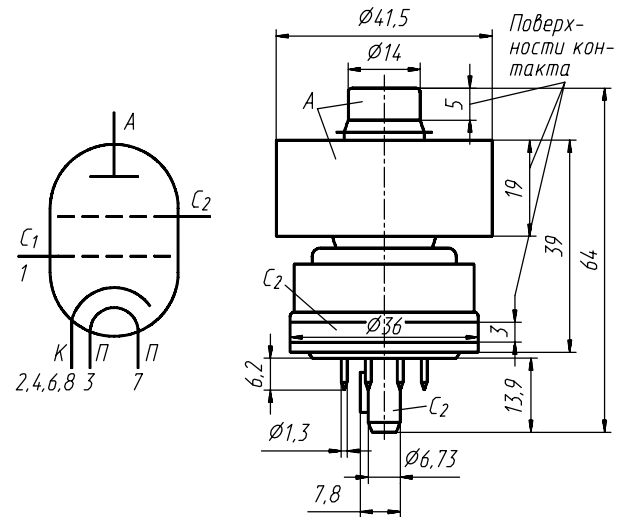


ГЧ-74Б

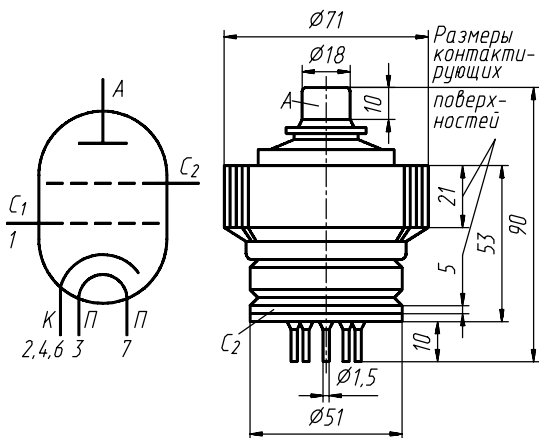


ГЧ-71Б

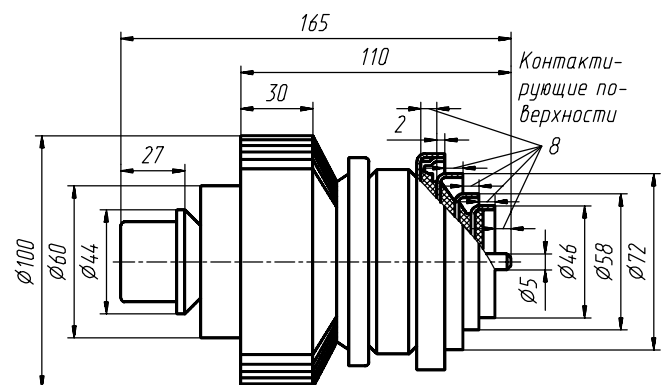


ГЧ-84Б

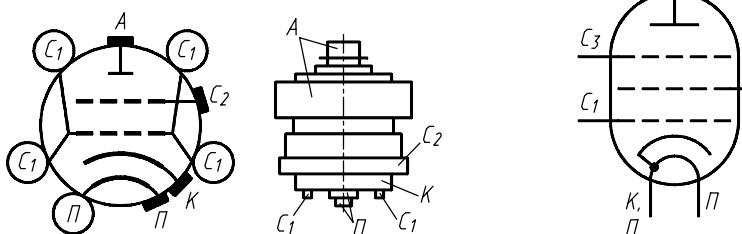




ГЧ-77Б

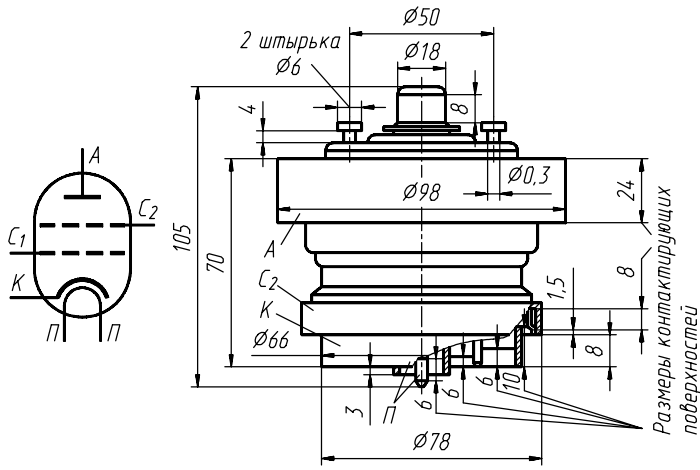


ГС-3А, ГС-3Б

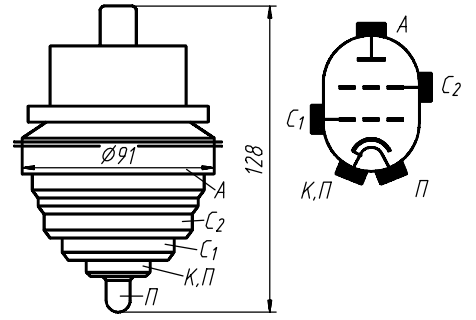


ГС-7А (ГС-7А-1), ГС-7Б (ГС-7Б-1)

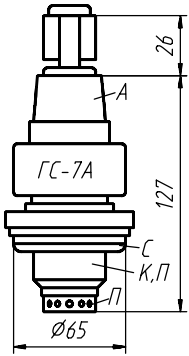


ГС-15Б

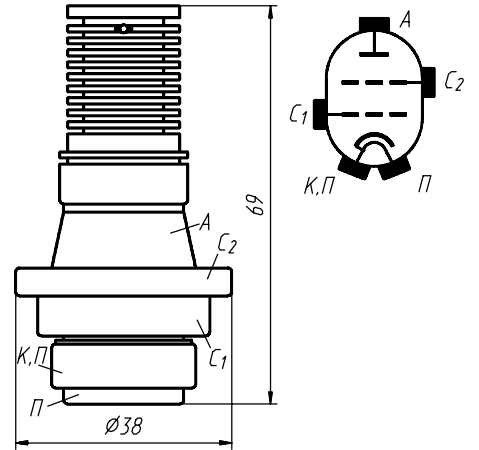

ГК-71

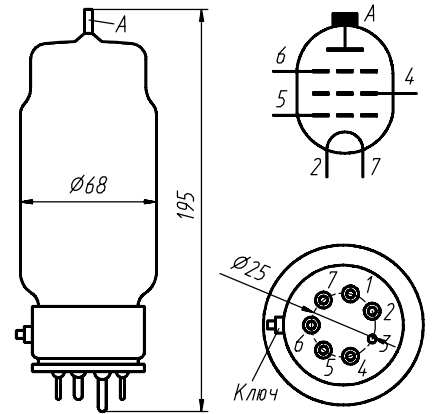

ГС-17Б

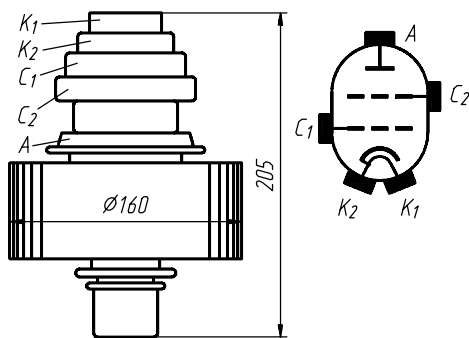

ГС-1Б, ГС-1Б-1

