





Cal. 6105A

**Characteristics**

Casing diameter: 27.00  $\phi$  mm  
 Maximum height: 5.15 mm  
 Vibrations per hour: 21,600  
 Automatic winding with sweep second  
 Calendar (date)  
 Instant date setting (rotating crown)  
 "Diashock" Shock Resistant Device

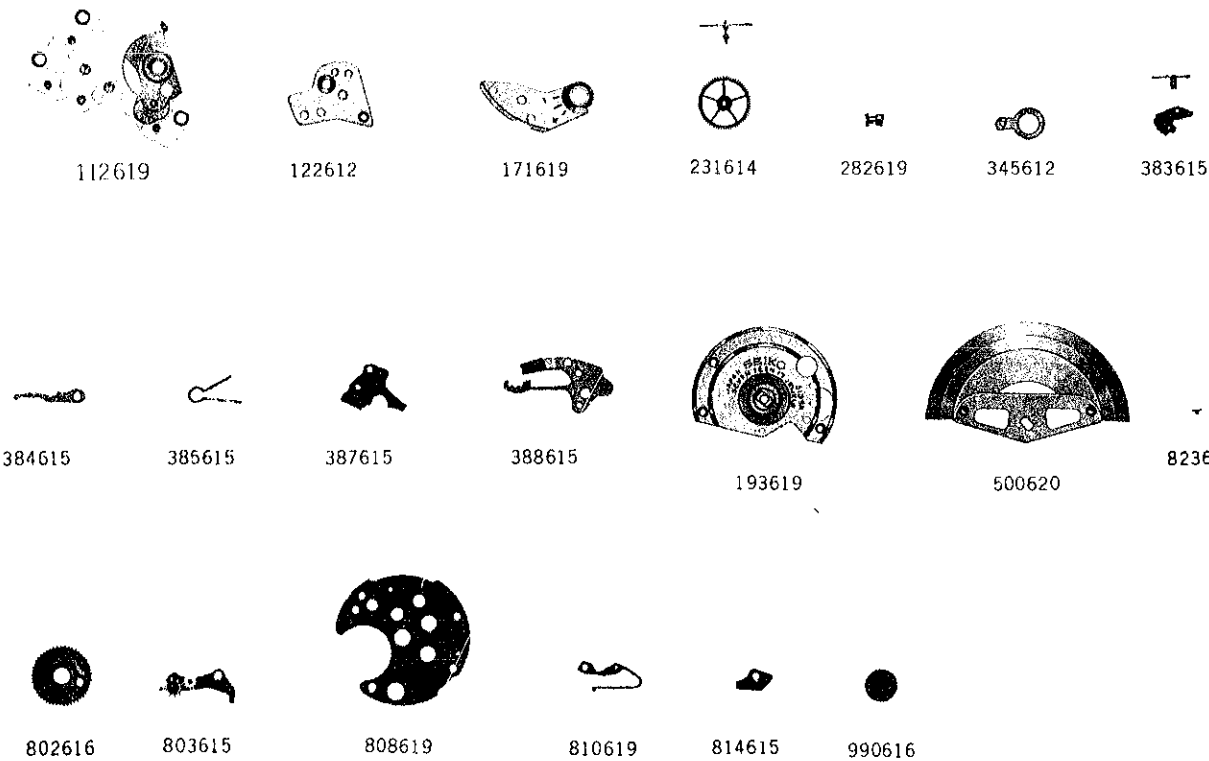

Calibre No. <b>6105A</b>		Jewels <b>17j</b>	Style Name	
⇨ Basic Calibre <b>6106A</b> 25J Catalog No. 61-06-1				
PART NO.	LIST OF MATERIALS	PART NO.	LIST OF MATERIALS	
<b>112619</b>	<b>Barrel &amp; train-wheel bridge</b>	<b>803615</b>	<b>Setting wheel lever complete</b>	
<b>122612</b>	<b>Center wheel bridge</b>	<b>808619</b>	<b>Date dial guard</b>	
161805	Pallet cock	<b>810619</b>	<b>Date jumper</b>	
<b>171619</b>	<b>Balance cock</b>	<b>814615</b>	<b>Setting wheel lever plate</b>	
<b>193619</b>	<b>Framework for automatic device with ball-bearing</b>	817610	Intermediate date wheel	
205613	Complete barrel with arbor	☆ 884611	Holding ring for dial	
213612	Barrel arbor	<b>990616</b>	<b>Date driving wheel holder</b>	
224611	Center wheel & pinion with cannon pinion	022150	Stud screw	
225611	Cannon pinion	022252	Holder screw for transmission wheel & pawl lever	
<b>231614</b>	<b>Third wheel &amp; pinion</b>	<b>022269</b>	<b>Minute wheel bridge screw</b>	
241611	Sweep second wheel & pinion	022351	Center wheel bridge screw	
251611	Escape wheel & pinion	<b>022458</b>	<b>Screw for oscillating weight</b>	
261611	Minute wheel	022467	Ratchet wheel screw	
271611	Hour wheel	022468	Pallet cock screw	
<b>282619</b>	<b>Clutch wheel</b>	022469	Bridge screw	
285611	Ratchet wheel	022470	Framework screw for automatic device with ball-bearing	
301611	Jewelled pallet fork & staff	022471	Click screw	
310611	Balance complete with stud	022662	Setting lever spring screw	
315611	Balance staff	022758	Dial screw	
331610	Roller with jewel	022760	Date dial guard screw	
341611	Regulator	022760	Setting wheel lever plate screw	
<b>345612</b>	<b>Stud holder</b>	011145	Upper hole jewel for center wheel	
354615	Winding stem	011146	Lower hole jewel for center wheel	
381611	Click	011306	Lower hole jewel for 3rd wheel	
<b>383615</b>	<b>Setting lever with axle</b>	011406	Upper hole jewel for escape wheel	
<b>384615</b>	<b>Yoke (Clutch lever)</b>	011406	Lower hole jewel for escape wheel	
<b>385615</b>	<b>Yoke spring (Clutch lever spring)</b>	011503	Upper hole jewel for pallet	
<b>387615</b>	<b>Minute wheel bridge</b>	011503	Lower hole jewel for pallet	
<b>388615</b>	<b>Setting lever spring</b>	011147	Upper hole jewel for transmission wheel	
☆ 397610	Lever for unlocking stem	011147	Lower hole jewel for transmission wheel	
401615	Mainspring with slipping attachment	023150	Tube for pallet cock screw (Cylinder type)	
014363	Diashock upper frame	023151	Tube for bridge screw	
014364	Diashock lower frame	023170	Tube for pallet cock screw (Recessed type)	
014365	Diashock hole jewel with frame	023171	Tube for framework screw of automatic device	
011210	Diashock cap jewel			
014317	Diashock spring			
<b>500620</b>	<b>Oscillating weight</b>			
505611	Transmission wheel			
<b>823619</b>	<b>Eccentric post</b>			
831611	Pawl lever with jewel			
839610	Holder for transmission wheel & pawl lever			
☆ 801610	Date dial			
<b>802616</b>	<b>Date driving wheel</b>			

**Remarks :**

**Lever for unlocking stem**  
 ☆ 397610 .....Used only for the one-piece waterproof case.

**Date dial**  
 ☆ 801610 (Black figures on white background) .....Used when the crown is located at 4 o'clock and the date frame at 3 o'clock.

If the date dial is required in any other type, specify ① Cal. No. ② the crown position ③ the date frame position and ④ the dial No.

**Holding ring for dial** ----- Measure the total thickness and the outside diameter -----  
 ☆ 884611 ..... 1.82mm total thickness and 29.1  $\phi$ mm outside diameter

If the holding ring for dial is required in any other type, specify ① Cal. No. and ② the dial No.